

# **MAX**

## **Manual (5.1 EN)**



## Symbols on the equipment

Please refer to the information in the operating manual.

**WARNING!**  
**Dangerous voltage!**

## Contents

<b>Safety precautions.....</b>	<b>3</b>
Information regarding use of loudspeakers.....	3
<b>MAX .....</b>	<b>4</b>
Connections.....	4
Operating modes.....	5
4-wire operation (standard wiring EP5 and NL4).....	5
2-wire operation (NL4 only).....	5
Operation with D6 or D12.....	6
Operation with D6.....	6
Operation with D12.....	6
Operation with E-PAC.....	8
Operation with P1200A and ampMAX module.....	9
Operation with P1200A and AMP-L module (NL4 only).....	9
Dispersion characteristics.....	10
Frequency response.....	10
Technical specifications.....	11
<b>Manufacturer's declarations.....</b>	<b>12</b>
EU conformity of loudspeakers (CE symbol).....	12
WEEE Declaration (Disposal).....	12

## General Information

MAX Manual

Version 5.1 EN, 03/2008, D2081.EN.05

Copyright © 2008 by d&b audiotechnik GmbH; all rights reserved.

Keep this manual with the product or in a safe place so that it is available for future reference.

When reselling this product, hand over this manual to the new customer.

If you supply d&b products, please draw the attention of your customers to this manual. Enclose the relevant manuals with the systems. If you require additional manuals for this purpose, you can order them from d&b.

d&b audiotechnik GmbH  
Eugen-Adolff-Strasse 134, D-71522 Backnang, Germany  
Telephone +49-7191-9669-0, Fax +49-7191-95 00 00  
E-mail: docadmin@dbaudio.com, Internet: www.dbaudio.com

## Safety precautions



### WARNING!

#### Information regarding use of loudspeakers

Never stand in the immediate vicinity of loudspeakers driven at a high level. Professional loudspeaker systems are capable of causing a sound pressure level detrimental to human health. Seemingly non-critical sound levels (from approx. 95 dB-SPL) can cause hearing damage if people are exposed to it over a long period.

In order to prevent accidents when deploying loudspeakers on the ground or when flown, please take note of the following:

When setting up the loudspeakers or loudspeaker stands, make sure they are standing on a firm surface. If you place several systems on top of one another, use straps to secure them against movement.

Only use accessories which have been tested and approved by d&b for assembly and mobile deployment. Pay attention to the correct application and maximum load capacity of the accessories as detailed in our specific "Mounting instructions" or in our "Flying system and rigging manuals".

Ensure that all additional hardware, fixings and fasteners used for installation or mobile deployment are of an appropriate size and load safety factor. Pay attention to the manufacturers' instructions and to the relevant safety guidelines.


Regularly check the loudspeaker housings and accessories for visible signs of wear and tear and replace them when necessary.

Regularly check all load bearing bolts in the mounting devices.

### CAUTION!

Loudspeakers produce a static magnetic field even if they are not connected or are not in use. Therefore make sure when erecting and transporting loudspeakers that they are nowhere near equipment and objects which may be impaired or damaged by an external magnetic field. Generally speaking, a distance of 0.5 m (1.5 ft) from magnetic data carriers (floppy disks, audio and video tapes, bank cards, etc.) is sufficient; a distance of more than 1 m (3 ft) may be necessary with computer and video monitors.

## MAX

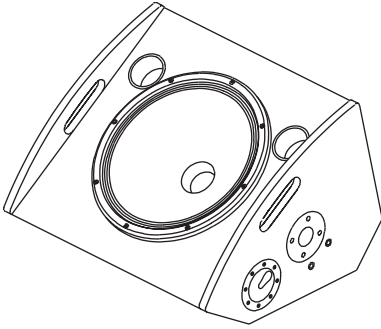

**MAX loudspeaker**

MAX is a 2-way floor monitor employing a 15"/2" coaxial driver combination with a passive crossover. The driver design allows the use of a compact, low height cabinet. MAX can be driven actively or passively.

Coaxially mounting the 2" HF and 15" LF drivers creates a very compact single driver whilst retaining the benefits of separate magnetic assemblies. The drivers are positioned together to utilize the combined shape and geometry of the LF cone and HF horn to create a single waveguide with a controlled, symmetrical 60° conical dispersion.

The MAX cabinet is constructed from marine plywood and has an impact resistant paint finish. The front of the loudspeaker cabinet is fitted with a rigid metal grill covered with a replaceable acoustically transparent foam. A socket to accept a loudspeaker stand, a ratchet strap helping bar and optional MAN CF4 stud plate rigging points complete the possible rigging options for MAX.

### **NOTICE:**

Only operate MAX cabinets with a correctly configured d&b amplifier, otherwise there is a risk of damaging the loudspeaker components.

As an alternative other high quality power amplifiers may be used, provided their output power does not exceed 500 Watts into 8 ohms and an additional subsonic filter is used (25 Hz with 12 dB/octave minimum), otherwise there is a risk of damaging the loudspeaker components.

### **Connections**

The MAX cabinet is fitted with two EP5 connectors. All pins of both connectors are wired in parallel.

Using one connector as the input, the second connector allows for direct connection to additional cabinets.

The MAX cabinet can be supplied with NL4 output connectors as an option.


Pin equivalents of EP5 and NL4 connectors are listed in the table below.

	<b>LF+</b>	<b>LF-</b>	<b>HF+</b>	<b>HF-</b>	<b>n.a.</b>
<b>EP5</b>	1	2	3	4	5
<b>NL4</b>	1+	1-	2+	2-	n.a.


## Operating modes

### 4-wire operation (standard wiring EP5 and NL4)


The MAX cabinet is driven by a 4-wire cable to allow the choice of active or passive operation. The HF and LF drivers are each fed by their own pair of pins and separate passive crossovers. Pin assignments 1/2 of the EP5 connectors (NL4: 1+/1-) connect the LF driver, pins 3/4 (2+/2-) connect the HF driver, as shown in the diagram opposite.

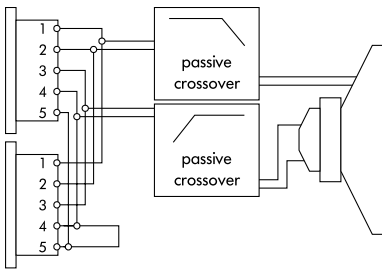

**Connector wiring  
(4-wire operation with EP5 connectors)**

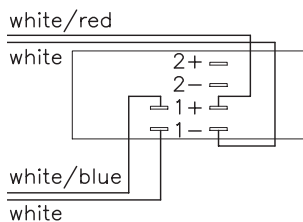

**Fig. 1: MAX 2-wire operation NL4**

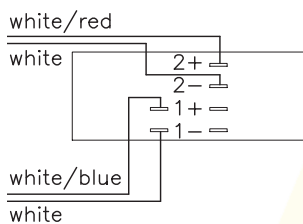

**Fig. 2: MAX 4-wire operation NL4**

### 2-wire operation (NL4 only)

For applications requiring dedicated passive use, the MAX cabinet's internal wiring can be configured for connection to pins 1+/1- of the NL4 connectors allowing use of a 2-wire cable.

In the 2-wire/passive configuration both the LF and HF drivers are connected to pins 1+/1- of the NL4 connector. Note that only the HF driver wiring (white and white/red) differs from that used in the 4-wire version.

The passive 2-wire configuration can also be used when the MAX cabinet is combined with a d&b active subwoofer and driven through a single 4-wire cable.

In the 2-wire configuration MAX can also be used with amplifiers from other manufacturers. The output connector of the amplifier or signal distribution box should feed the positive signal to pin 1+ and the negative signal to pin 1- of the cabinet's NL4 connector.

### Modification

Tools required: 2.5 mm Allen key

1. Undo the four Allen screws of the connector plate.
2. Take off the connector plate.
3. Change the wiring on the back of the connector plate to the desired configuration as shown in the illustrations opposite (1 and 2).
4. Refit the connector plate.

## Operation with D6 or D12

Select the controller setup MAX.

MAX cabinets can also be operated with the LINEAR setup of D12 and E-PAC amplifiers. However, the MAX setup provides low-end equalization and limiter settings specially tuned for MAX cabinets used as stage monitors thus providing improved performance and headroom.

**Note:** When MAX cabinets are used as downfills or frontfills for C4 systems, passive operation is recommended. In Active mode the phase response of MAX cabinets is not compatible with C4 systems.

### Operation with D6

Up to a total of two MAX loudspeakers can be passively driven by each D6 amplifier channel.

### Operation with D12


The D12 allows the MAX cabinet to be driven either in "2-Way Active" mode or in passive mode.

#### Active operation ("2-Way Active")


Selecting "2-Way Active" mode with the MAX setup enables up to two MAX cabinets to be actively driven by the D12 amplifier. In applications with low continuous levels and low ambient temperatures up to three cabinets may be connected.

In "2-Way Active" mode the D12 routes separate LF and HF signals to the amplifier channels. Pins 1/2 of both EP5 output connectors (NL4: 1+/1-) carry the LF signal, pins 3/4 (2+/2-) carry the HF signal. The output connector pin assignment is changed automatically when "2-Way Active" mode is selected.


The input signal can be fed either to INPUT A or to INPUT B and is routed (linked) to both amplifier channels internally.

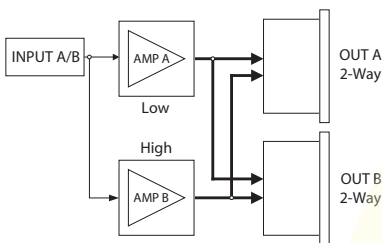

**D12 Input/Output routing "2-Way Active"**

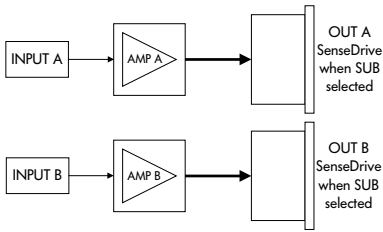

**D12 Input/Output Routing Dual channel**

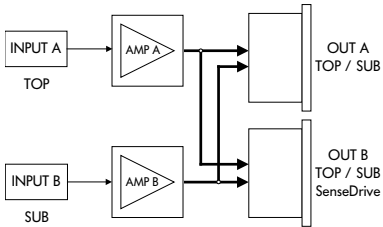

**D12 Input/Output routing Mix TOP/SUB**

**Passive operation**

Selecting the MAX setup of the D12 in either "Dual channel" or "Mix TOP/SUB" mode enables up to two MAX cabinets to be driven by the respective channel. In applications with low continuous levels and low ambient temperatures up to three cabinets per channel may be connected.

**Passive operation ("Dual channel" mode)**

In "Dual channel" mode, the MAX cabinet can be used in either 4-wire or 2-wire operation. The respective channel has to be set to MAX. Each amplifier drives all output pins on the channel's output connector. Pins 1/3 of the EP5 output connector (NL4: 1+/2+) carry the positive and pins 2/4 (1-/2-) carry the negative components of the signal.

**Passive operation ("Mix TOP/SUB" mode - NL4 only)**

In "Mix TOP/SUB" mode, the MAX cabinet has to be configured for 2-wire operation.

Selecting the MAX setup mode for channel A and an applicable subwoofer for channel B allows a single D12 to drive two MAX and two active subwoofer cabinets.

When the D12 is operated in "Mix TOP/SUB" mode, the MAX cabinet and a respective active subwoofer can be linked together locally and fed by a single 4-wire cable from either amplifier output connector.

**Note:**

To apply SenseDrive for the subwoofer, EP5 connectors and 5-wire cables have to be used. When operated in "Mix TOP/SUB" mode, the subwoofer has to be fed from the output B connector of the D12 amplifier.

## Controller settings

For acoustic adjustment the settings CUT, HFA and CPL can be selected.


### CUT

Set to CUT, a high pass filter with a 130 Hz cut off frequency is inserted in the controller signal path. The MAX is now configured for use with d&b active subwoofers.


### HFA circuit

In HFA mode (High Frequency Attenuation), the HF response of the MAX is rolled off. The HFA circuit provides a natural, balanced frequency response when a unit is placed close to listeners in near field or delay use.



High frequency attenuation begins gradually at 1 kHz, dropping by approximately 3 dB at 10 kHz. This roll off mimics the decline in frequency response experienced when listening to a system from a distance in a typically reverberant room or auditorium.

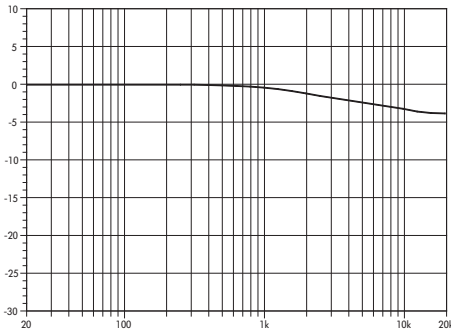

Frequency response of HFA circuit

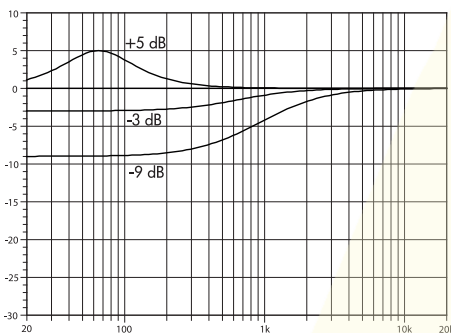

Frequency response of CPL circuit



E-PAC version 1, E-PAC version 2  
E-PAC configuration for "Linear" mode

### CPL circuit

The CPL (Coupling) circuit compensates for coupling effects between the cabinets when building closely coupled arrays. CPL begins gradually at 1 kHz, with maximum attenuation below 400 Hz, providing a balanced frequency response when the MAX cabinet is used in arrays of two or more. The function of the CPL circuit is shown in the diagram opposite and can be set in dB attenuation values between -9 and 0, or a positive CPL value which creates an adjustable low frequency boost around 65 Hz (0 to +5 dB).

## Operation with E-PAC

To drive MAX cabinets, select the MAX or LINEAR setup.

E-PACs version 1 or 2 only provide the Linear setup. The configuration is set by the appropriate DIP switches on the rear panel.

In LINEAR mode all four pins on the NL4 connector are driven by the E-PAC power amplifier, pins 1+ and 2+ carry positive signal, 1- and 2- carry negative signal. The MAX cabinet can be used in either 4-wire or 2-wire configuration.

For an E-PAC version 3, the configuration is set via the encoder in conjunction with an LCD.

The E-PAC allows to drive one MAX loudspeaker. LO IMP mode configures the E-PAC to drive a maximum of two MAX loudspeakers with a 6 dB reduction in input level to the loudspeakers.

The CUT and HFA settings are available on E-PAC versions 2 and 3. The characteristics of the CUT and HFA settings are explained in the previous section "Operation with D6 or D12 - Controller settings".



## Operation with P1200A and ampMAX module

The combination of P1200A and ampMAX allows the MAX cabinet to be driven either in "2-Way Active" mode or in Passive mode.

### 2-WAY ACTIVE switch

The "2-Way Active" operation is described in the previous section "Operation with D12 - "2-Way Active" operation".

If "2-Way Active" is selected, the left volume control (CH A / ACTIVE) controls both channels and sets the overall level while the right volume control (CH B / HF-LEVEL) sets the relative HF level.

### CUT switch

The CUT setting is available. The characteristics of the CUT setting are explained in the previous section "Operation with D6 or D12 - Controller settings". In active mode only the channel A CUT switch is functional.

### LFC switch

When the MAX cabinet is used without an active subwoofer, selecting LFC (Low Frequency Compensation) extends the low frequency response of the MAX cabinet down to 75 Hz. In active mode only the channel A LFC switch is functional.

### Active operation ("2-Way Active")

The ampMAX module contains a switchable electronic crossover which routes separate LF and HF signals to the P1200A amplifier channels.

A P1200A mainframe can drive two MAX cabinets in active mode.

### Passive operation

In standard passive mode, ampMAX provides two linear amplifier channels. All pins of the respective output connector are driven by its associated amplifier channel.

Up to two MAX cabinets per channel can be driven in passive mode.


## Operation with P1200A and AMP-L module (NL4 only)

The AMP-L module provides a single linear amplifier channel, which drives the pins 1+/1- of the respective NL4 output connector. For operation with the AMP-L module the MAX cabinets has to be configured for 2-wire operation (see previous section "2-wire operation").


A P1200A mainframe fitted with two AMP-L modules can drive two MAX cabinets per channel in passive mode. Fitting one AMP-L and one subwoofer controller module allows a single mainframe to drive two MAX and two active subwoofer cabinets. All cabinets can be linked together locally and fed by a single 4-wire cable from either mainframe output connector.

### CUT switch


The CUT setting is available. The characteristics of the CUT setting are explained in the previous section "Operation with D6 or D12 - Controller settings".

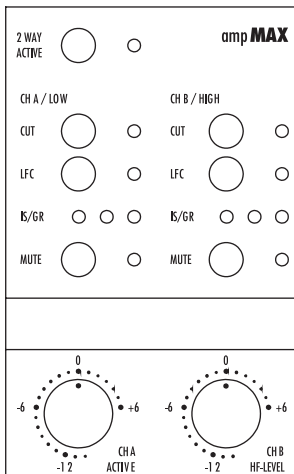


Controls on ampMAX module

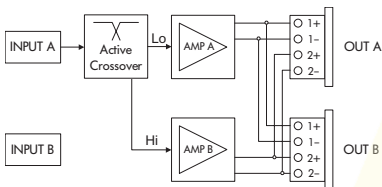

P1200A with ampMAX, "2-Way Active" mode

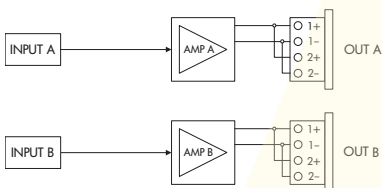


P1200A with ampMAX, "Passive" mode

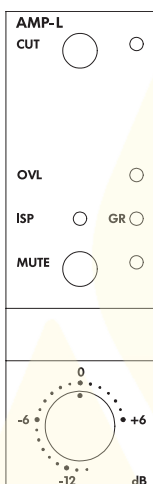

Controls on AMP-L module

## Dispersion characteristics


Due to the conical coverage pattern of the coaxial driver design the horizontal and vertical dispersion characteristics of the MAX are largely identical (slight differences which do occur are attributable to the cabinet shape). The diagram below shows dispersion angle versus frequency plotted using lines of equal sound pressure (isobars) at  $-6$  dB and  $-12$  dB. The nominal  $60^\circ$  dispersion angle is maintained from 4 to 10 kHz.

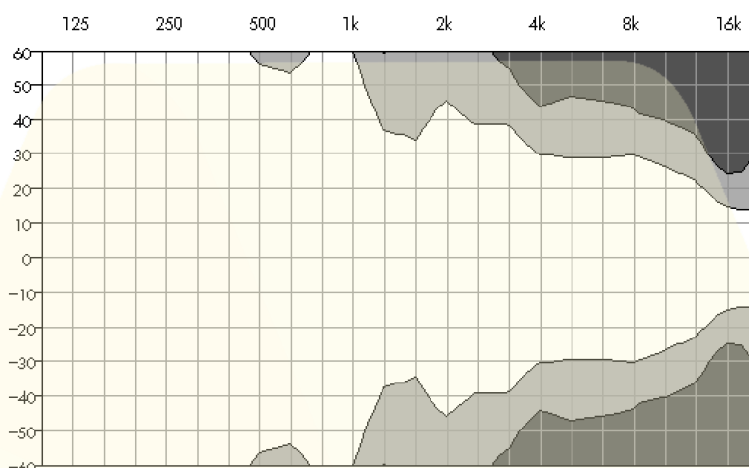


**MAX isobar diagram**

## Frequency response

The diagrams below show the different response curves for MAX driven with the D12 amplifier. The response in standard mode with the Linear setup selected is equivalent to the operation with a linear power amplifier (SPL at a distance of 1 m (3.3 ft), output voltage 2.83 V).

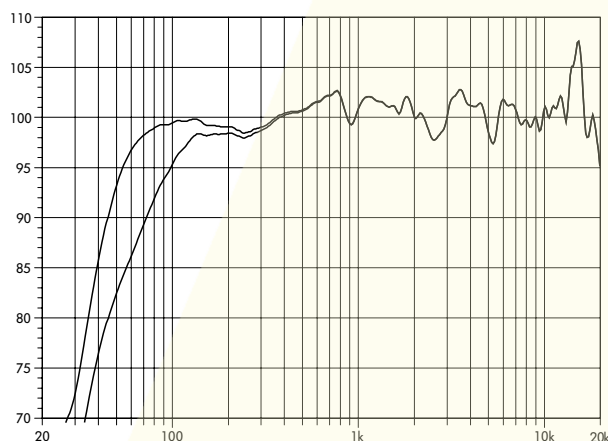

**MAX frequency response (MAX setup, floor coupling), standard and CUT**

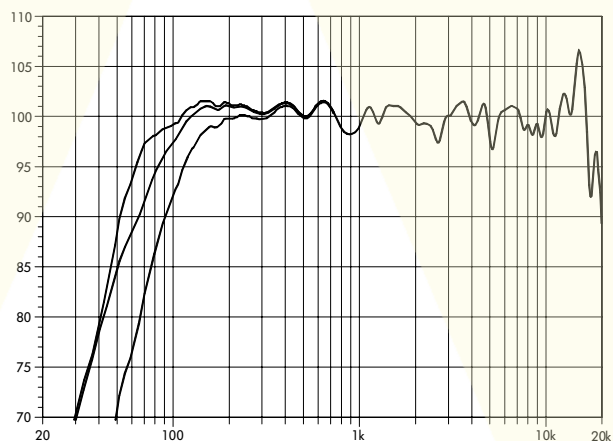

**MAX frequency response (linear setup, free field) CPL +5, standard and CUT**

## Technical specifications

### MAX system data, passive setup


Max. sound pressure (1 m, free field) with D12.....	135 dB
Max. sound pressure (1 m, free field) with D6.....	131 dB
Max. sound pressure (1 m, free field) with P1200A.....	133 dB (SPLmax peak, pink noise test signal with crest factor of 4)
Input level (100 dB SPL / 1 m).....	-17 dBu

### MAX system data, active setup


Max. sound pressure (1 m, free field) with D12.....	136 dB
Max. sound pressure (1 m, free field) with P1200A (ampMAX).....	135 dB (SPLmax peak, pink noise test signal with crest factor of 4)
Input level (100 dB SPL / 1 m).....	-17 dBu

### MAX loudspeaker

Frequency response (-5 dB, MAX setup).....	55 Hz - 18 kHz
Frequency response (-5 dB, Linear setup, free field).....	85 Hz - 18 kHz
Sensitivity (2.83 V / 1 m).....	100 dB
Nominal impedance.....	8 ohms
Power handling capacity (RMS / peak 10 ms).....	250 / 1200 W
Nominal dispersion angle.....	60° conical
Connections.....	2 x EP5
.....	optional 2 x NL4
Pin assignments EP5.....	LF+: 1/LF-: 2
.....	HF+: 3/HF-: 4
Pin assignments NL4.....	LF+: 1+/LF-: 1-
.....	HF+: 2+/HF-: 2-
Weight.....	26 kg (57 lb)

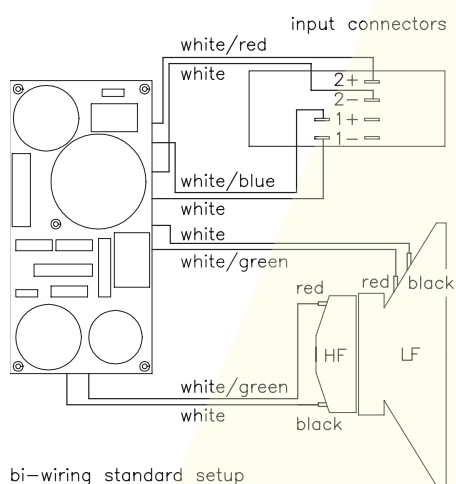

**MAX wiring diagram  
(4-wire standard setup NL4)**

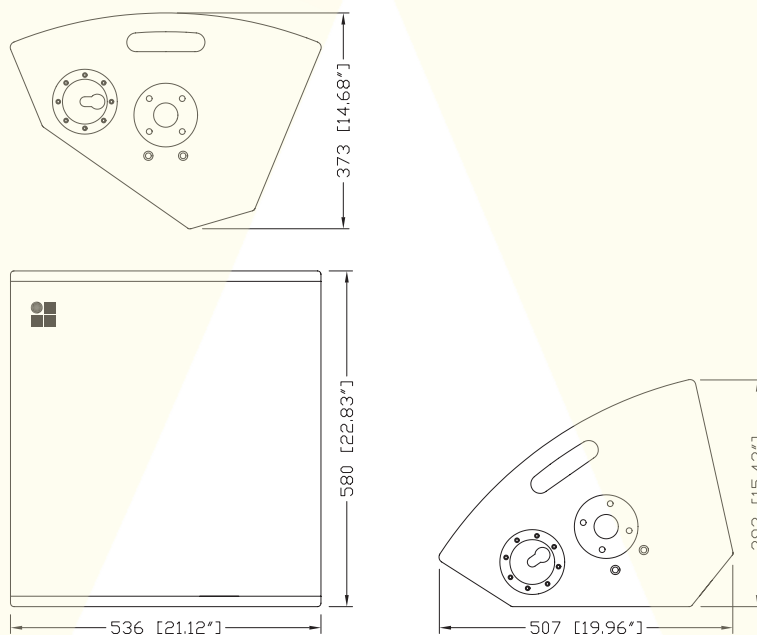

**MAX cabinet dimensions in mm [inch]**

## Manufacturer's declarations



### EU conformity of loudspeakers (CE symbol)

This declaration applies to:

#### - **MAX loudspeaker Z1100**

manufactured by d&b audiotechnik GmbH.

All production versions of this type are included, provided they correspond to the original technical version and have not been subject to any later design or electromechanical modifications.

We herewith declare that said products are in conformity with the provisions of the respective EC directives including all applicable amendments.

A detailed declaration is available on request and can be ordered from d&b or downloaded from the d&b website at [www.dbaudio.com](http://www.dbaudio.com).

### WEEE Declaration (Disposal)

Electrical and electronic equipment must be disposed of separately from normal waste at the end of its operational lifetime.

Please dispose of this product according to the respective national regulations or contractual agreements. If there are any further questions concerning the disposal of this product please contact d&b audiotechnik.